

Wood Burning Fireplaces



BWB400A Radiant Wood Burning Fireplace shown with optional brass bifold doors.

BWB400A/BWB500A Radiant and BWBC400A/BWBC500A Circulating Wood Burning Fireplaces

- Available in 36" and 42" with radiant or circulating face
- Largest viewing area in the industry with a true 36" and 42" brick to brick opening
- 21" deep fireplace
- Available in insulated models for cold weather climates (BWB400IA/BWBC400IA/BWB500IA/BWBC500IA)
- Fireplace interiors have all refractory brick to provide a realistic masonry look, with steel mesh molded in for durability
- Damper included to help prevent heat loss when fireplace is not in use
- Gas knockouts on both sides of the fireplace for adding gas appliances
- Black fire screens to protect against sparks
- Optional glass doors available in polished brass, stainless or black finish

- Optional blower for use with circulating units
- 25-year warranty ensures dependability
- U.L. listed for safety

*Heat with
Personality.*

MONESSEN
HEARTH SYSTEMS

OPTIONAL ACCESSORIES & SPECIFICATIONS

Product Specifications

Model	Insulated Model	Width		Height		Depth		Viewing Area (Sq.In.)	Opening Dimensions (W x H x D)	Radiant or Circulating	Design Certified
		Actual	Framing	Actual	Framing	Actual	Framing				
BWB400A	BWB400IA	40"	40-1/2"	40-1/2"	40-3/4"	21"	21-1/2"	774	36" x 21-1/2" x 17"	Radiant	UL
BWBC400A	BWBC400IA	40"	40-1/2"	40-1/2"	40-3/4"	21"	21-1/2"	774	36" x 21-1/2" x 17"	Circulating	UL
BWB500A	BWB500IA	46"	46-1/2"	40-1/2"	40-3/4"	21"	21-1/2"	903	42" x 21-1/2" x 17"	Radiant	UL
BWBC500A	BWBC500IA	46"	46-1/2"	40-1/2"	40-3/4"	21"	21-1/2"	903	42" x 21-1/2" x 17"	Circulating	UL




BWB400A Wood burning Fireplace

BWB400A/BWB500A Radiant and BWBC400A/BWBC500A Circulating Framing Dimensions (8" Double Wall Chimney Builder Series)

	BWB400A	BWBC400A	BWB500A	BWBC500A
A	40-1/2"	40-1/2"	46-1/2"	46-1/2"
B	40-3/4"	40-3/4"	40-3/4"	40-3/4"
C	24-13/16"	24-13/16"	30-13/16"	30-13/16"
D	13-1/2"	13-1/2"	16-1/2"	16-1/2"
E	67-7/8"	67-7/8"	73-7/8"	73-7/8"
F	34"	34"	37"	37"
G	21-1/4"	21-1/4"	21-1/2"	21-1/2"
H	48"	48"	52-1/4"	52-1/4"
I	36"	36"	42"	42"
J	21-1/2"	21-1/2"	21-1/2"	21-1/2"

Optional Accessories:

- Easy snap in bifold glass doors:
 - Polished Brass Finish (GD36PBA/GD42PBA)
 - Black Finish (GD36BA/GD42BA)
 - Stainless Steel Finish (GD36SSA/GD42SSA)
- 200 CFM blower (FA2A)
- Outside Air Kit (AK4)

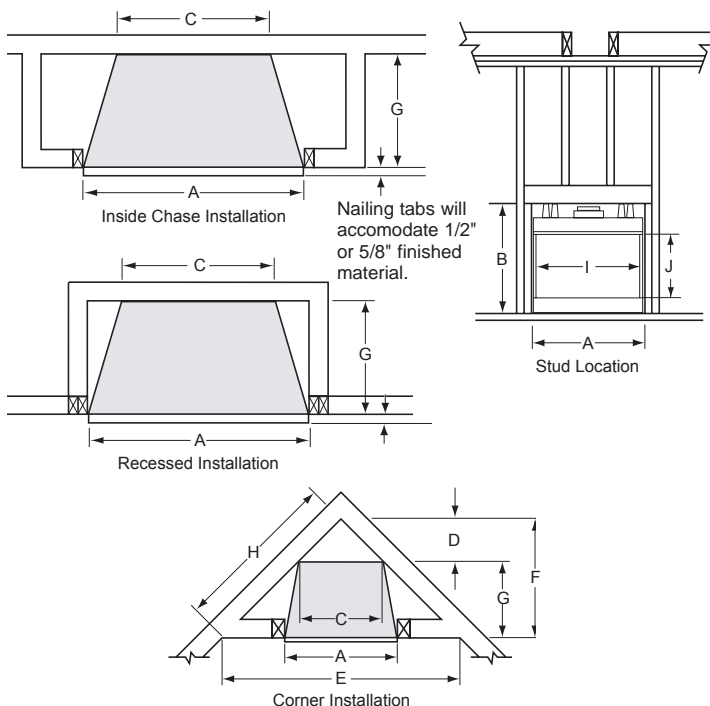

MONESSEN
HEARTH SYSTEMS

149 Cleveland Drive • Paris, Kentucky 40361

www.monessenhearth.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice.

© 2004 Monessen Hearth Systems, Inc.



Sold by: