

DIS Vent Free Gas Fireplace Insert

The DIS provides supplemental heat without the hassle of wood, but with the realism of glowing coals and dancing yellow flames.

- Features the new TRIPLE PLAY BURNER SYSTEM™ with exclusive triple effect technology producing a full random yellow flame, full depth ember bed, and glowing logs
- Designed to fit most masonry fireplaces, fitting a minimum fireplace opening of 24" high and 33" wide
- Thermostatically controlled blower (135 cfm), fiber ceramic cottage clay firebrick and standard black removable louver system
- Integrated Safety Shut-off Valve
- No venting required for easy installation
- Heats up to 950 sq. ft., all the heat stays in your home
- Two control options: Thermostat or "Remote Ready" Millivolt
- Optional brass louvers and face plates with brass trim available (shown above with Face Plate)

- Concealed control panel accessible from lower louver
- Fixed safety screen for peace of mind
- CSA design certified

Heat with Personality.



OPTIONAL ACCESSORIES & SPECIFICATIONS

Product Specifications										
	Width	Width	Height of	Height of	Depth of	Total	Thermostat or Millivolt Control BTU/HR		Approx. Heating Area/	Design
Model	Front	Back	Front	Back	Insert	Depth	NG	LP	Sq. Ft.	Certified
DIS Insert Only	33"	22-3/4"	26-3/4"	23-7/8"	15-1/4"	16-1/2"	19,000-28,000	23,000-28,000	950	CSA
Small Face Plate	43-1/4"	-	33"	-	-	_	-	_	_	_
Large Face Plate	50-1/4"	_	36"	-	_	_	_	_	_	_

FIELD INSTALLED ACCESSORIES

- 33" Polished Brass Louvers
- 36" High x 50" Wide Black Large Face Plate with Brass Trim
- 33" High x 43" Wide Black Small Face Plate with Brass Trim



DIS shown with optional Black Face Plate and **Brass Louvers**

Millivolt Control Options

- Wall switch with 15 feet of wire
- Wall mounted thermostat with 15 ft. of wire



On/Off Hand-Held with Receiver.



On/Off Hand-Held Remote Control with 90 min. Countdown Timer with Receiver.



On/Off Thermostat Hand-Held Remote Control with Receiver.



Hand-Held Programmable Thermostat Remote Control with Receiver



On/Off Thermostat Hand-Held Remote Control with 3-Speed Blower



Touch Light™ Table Top/Wall Mount TLM On/Off and TLT Thermostat Remote Control with Receiver. Control with Receiver.



Programmable Wireless Wall Thermostat with Receiver.



149 Cleveland Drive • Paris, Kentucky 40361

www.monessenhearth.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice.

MADE IN U.S.A.

DIS-MHS3806












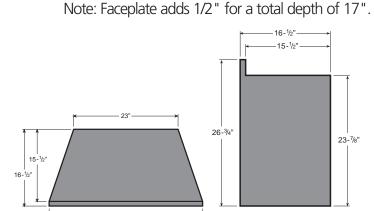

VENT•FREE ADVANTAGE.

Vent-free gas appliances continue to be the sensible choice when looking for a supplemental heating source. Since no outside venting is required, all the heat stays in your home and the high heating efficiency provides comfortable warmth for only pennies an hour. And since vent-free appliances do not require electricity to operate, they are an excellent heat source during power outages. Vent free gas appliances are environmentally clean, safe, and operate within industry indoor air quality standards as well as being design certified by CSA.

REGULATORY APPROVAL

The DIS series is of vent free gas inserts has been tested and approved by CSA as an unvented room heater to the latest ANS Z21.11 requirements. Approved for installation in an aftermarket manufactured (mobile) home, where not prohibited by state or local codes.

Warning:

- It is recommended that the screen be used during operation of this log set. Always ensure the screen has adequate spaces to allow for passage of combustion air to the gas log set.
- Correct installation of the ceramic fiber logs, proper location of the heater and periodic cleaning are necessary to avoid potential service problems with sooting.
- Keep small children and animals away from the open flame of the gas log set at all
- There may be a start-up odor associated with the heating of the logs. The odor should diminish in 2-3 hours of operation with the burner at its highest setting with the fan in the off position.